



## RollCheck® Max

- Designed for medium to large machines
- 4 inch or 101mm to 8 foot or 2400mm roll diameters
- Shots greater than 10 feet or 3 meters
- Bright GREEN laser lines
- Rechargeable lithium ion batteries
- Reduces down time and product waste due to misalignment of rolls
- Increases production with proper alignment of rolls
- Compact design, fits into small spaces
- FAST and EASY to use
- No training required
- One-person operation
- Facilitates more frequent roll checks
- Pays for itself quickly
- Uses proven reflected laser beam technology




### Laser Alignment Tool for Accurate Visual Alignment of Rolls

#### *Patented Reflected Laser Beam Technology*


The RollCheck® Green laser alignment system for parallel roll alignment is lightweight, compact and durable. The system can be attached to just about any size roll with the supplied straps. We use our proven reflected laser beam technology for maximum angular resolution, thus providing you with the most reliable and accurate visual reading. Using the latest in Green laser diode technology makes our green laser line 10x's brighter to the operator than a red laser line.

The RollCheck® can measure spans up to 10 ft. (3 m) or better from roll to roll of any size, large or small. A laser line is projected from the RollCheck® transmitter to the reflector mounted on the roll to be checked or aligned. The laser line projected to the reference line on the reflector indicates immediately if the roll is aligned vertically to the stationary roll. The laser line is then automatically reflected back to the transmitter's reference line indicating if the rolls are parallel to one another. This system is very easy to use; a single person can perform the alignment task in minutes with no training! The RollCheck® comes in its own durable carrying case.

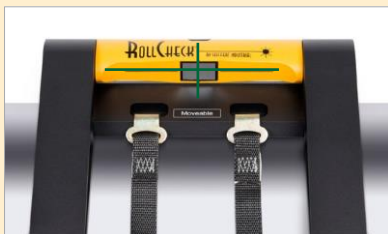

#### **Rolls are aligned vertically...**

When horizontal line coincides with the horizontal groove on the reflector unit.

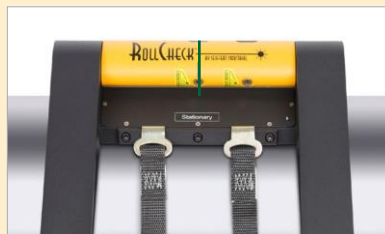

#### **Rolls are parallel...**

When vertical reflected line coincides with the vertical groove on the laser transmitter unit.

#### GMGA MEASURING

No. 33 Alley 99/120 Dinh Cong Ha, Dinh Cong Ward, Hoang Mai District, 10000 Hanoi City, Vietnam

Telephone: +84 845 969 336

Email: [info@gmga.vn](mailto:info@gmga.vn)

<https://gmga.vn/>


© 2023 GMGA MEASURING

**Parallel Roll Alignment, utilizing the RollCheck® Laser Roll Alignment System to measure and correct vertical and horizontal angle between 2 rolls.**

RollCheck® is a laser roll alignment system that facilitates accurate visual alignment of process rolls during replacement operations. The Laser Transmitter is mounted to a stationary roll that transmits two green laser lines to the Reflector positioned on the roll to be moved. The operator then is able to view both the vertical (pitch) and

horizontal (parallel) angles and accurately adjust the roll into parallel alignment. RollCheck® is suitable for aligning rolls of most diameters that are spaced from 6" (152 mm) to 10 ft. (3 m) or more apart. It also can be used to align and measure crowned rolls as well.

RollCheck® eliminates cumbersome trial and error adjustments which lead to scrap, loss of time and output reduction and is the ideal tool for efficient roll maintenance.

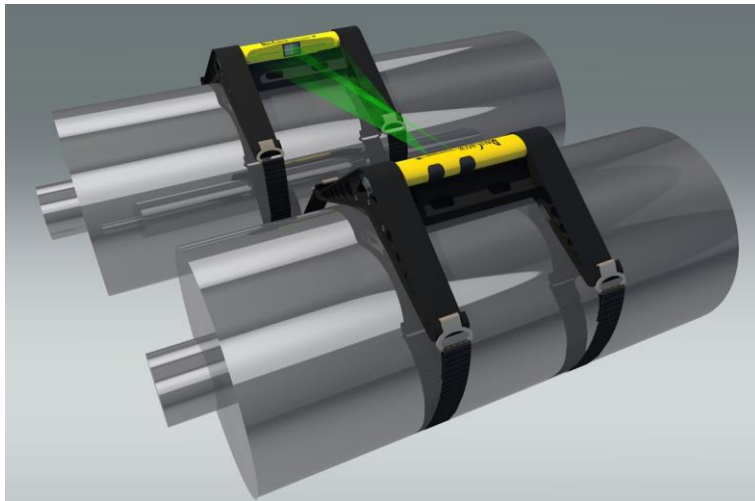

*Patented Reflected Laser Beam Technology*

ROLLCHECK® MAX - LASER ROLL ALIGNMENT SYSTEM

Simply match the green laser lines with the black reference lines on the RollCheck®. You will see the results in seconds.

**Examples of roll misalignment**

*Front View*

*Top View*





Roll to be moved (RTBM) is not on the same horizontal plane as the stationary roll.

Reflected laser line shows the roll is not parallel-left.

Reflected laser line shows the roll is not parallel-right.

**Examples of rolls that are in alignment**

*Front View*

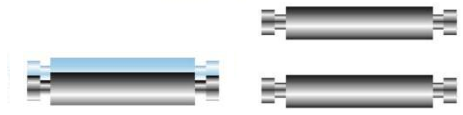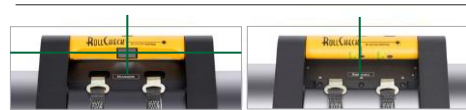

Roll to be moved (RTBM) is on the same plane as the stationary roll.

Reflected line shows the rolls are parallel to one another.

**GMGA MEASURING**

No. 33 Alley 99/120 Dinh Cong Ha, Dinh Cong Ward, Hoang Mai District, 10000 Hanoi City, Vietnam

Telephone: +84 845 969 336

Email: [info@gmga.vn](mailto:info@gmga.vn)

<https://gmga.vn/>

© 2023 GMGA MEASURING

**Technical Data - RollCheck® Max SX-6150**



**Transmitter Model SX-6150T**

Operating distance: Max. 10 ft. (3 m) Accuracy: < 0.001"/ft. (< 0.03 mm/m)

Laser type: 2 ea. 532nm visible green laser lines, 45° full angle

Laser power: < 1mW, Class 2 Safety

precautions: Do not stare into beam

Laser compliance: CFR parts 1040.10 and 1040.11 Laser

line thickness: 0.017" (0.4318 mm) at 9 ft. (2.8 m)

Laser calibration: Factory calibrated, check yearly

Environmental protection: Water resistant, dust proof and impact resistant

Controls: Laser ON/OFF rocker switch

Battery type: High power polymer li-Ion rechargeable battery. 3.7v 4000mAh

Operating time: 16 – 20 hours continuous at 72° F (22° C)

Temperature: Operating: 32° F (0° C) to 125° F (52° C)  
Storage: -4° F (-20° C) to 140° F (60° C)

Frame: Rigid aluminum frame, powder-coat paint finish

Laser housing: Aluminum, powder-coat paint finish

diameters: Roll diameters 4" (101mm) up to 8" (2400mm)

Mounting straps: Set of 2 attachment straps included: 2 ea. 10" (254 mm) to 45" (1143 mm) adjustable bungee straps for diameters up to 15" (381 mm)  
2 ea. 10 ft. (3 m) adjustable straps for diameters up to 38" (965 mm)

Weight: 8.8 lbs. (4.0 Kg)

Dimensions: 12" (305mm) W x 16.5" (419mm) D x 6" (152mm) H

**Reflector Model SX-6150R**

Reflector size: 1" (25 mm) x 1.4" (36 mm)

Frame: Rigid aluminum frame, powder-coat paint finish

Reflector housing: Aluminum, powder-coat paint finish

Mounting straps: Set of 2 attachment straps included: 2 ea. 10" (254 mm) to 45" (1143 mm) adjustable bungee straps for diameters up to 15" (381 mm)  
2 ea. 10 ft. (3 m) adjustable straps for diameters up to 38" (965 mm)

Weight: 9.0 lbs. (4.1 Kg)

Dimensions: 12" (305mm) W x 16.5" (419mm) D x 6" (152mm) H

**Carrying Case**

Material: Black, high density hard polyethylene

Dimensions: 29" (736mm) W x 18" (457mm) D x 10.85" (275mm) H

Insert: Die cut foam

Carrying case weight: 28.2 lbs. (12.8Kg)

Total system weight: 46.4 lbs. (21.0Kg)