

CB9 Series

- ★ One-touch video/audio recording and image capture
- ★ Support max 256G SD card or USB stick
- ★ Zoom function (8 levels)
- ★ Cable M/FT counter and text
- ★ 4-hour battery life

- ★ 360° rotation camera
- ★ 512Hz transmitter
- ★ Universal skid
- ★ Optional removable camera heads with different size (manual focus and self-levelling)

Camera head

Zoom out

Image capture

Zoom in (8 levels)

Record video/audio

9 inch TFT color screen

USB stick

SD card slot

Text

Engineering case

512Hz transmitter

ø9.5mm, 60m cable reel

Rotate the remote

Controller

Brightness button


Counter

Cable brake







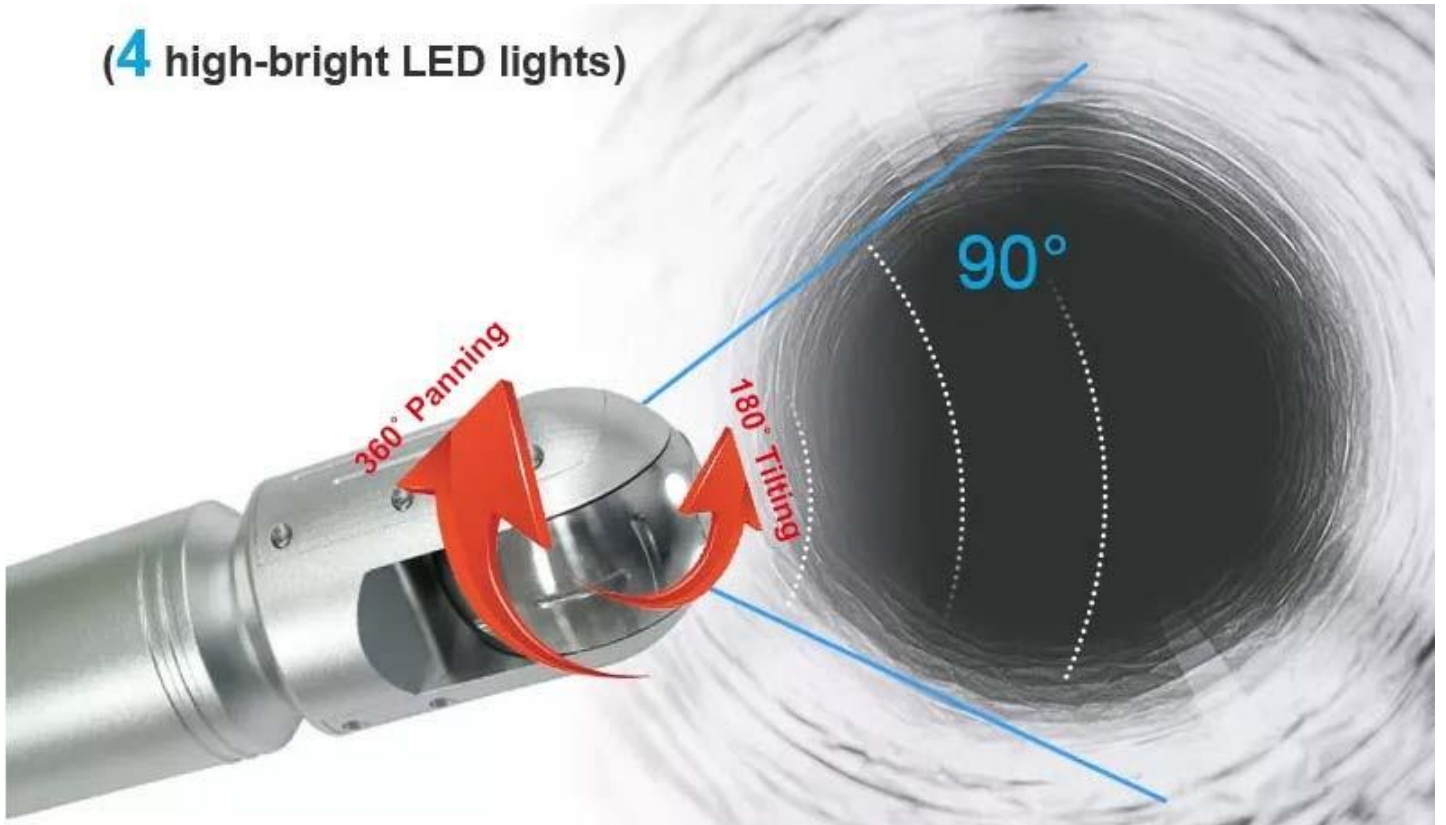


Standard Accessories

	<p>Camera size: ø50mm*170mm Total pixels: 960TV line Leds: 4pcs View angle: 90° Waterproof: IP68 Skids: 110/150/220mm Suitable pipe diameter: 60-600mm Rotation: 360° Panning; 180° Tilting</p>		<p>Storage medium: 8G SD card (max 256G) & USB stick DVR total pixels: 720*576 Movie format: AVI Photo format: JPEG 8 levels digital zoom Charge time: 5 hours Running time: ≥4 hours</p>
	<p>Cable size: 768(L)*396(W)*820(H)mm Counter Cable length: 60m Cable diameter: ø9.5mm Max length: 120m</p>		<p>Screen size: 9 inch TFT color screen Total pixels: 800*480 Size: 460(L)*370(W)*180(H)mm Case material: Engineering plastic</p>
			

(4 high-bright LED lights)



Standard Package Accessory

Item	Image	Description
Camera Head & Skids		<ul style="list-style-type: none"> • $\varnothing 50 \times 160$MM Camera Head • $\varnothing 110$mm, 150mm, 220mm skid 
		<ul style="list-style-type: none"> • Universal skid • range: 140~330MM • weight : 1.24KG
Control Box		<ul style="list-style-type: none"> • 9 inch digital Color • Monitoring & Video recording & text writing • Storage: 8G SD card & card reader (max 256G) • keyboard • 460(L)\times370X180(H)mm ABS case • 12.6V 4400MAH battery & 12.6V/1A charger
Cable Wheel		<ul style="list-style-type: none"> • Cable Wheel: 770(L)\times371(W)\times810(H) • Wire Material: Fiberglass rod • Wheel Material: Stainless steel • Cable Diameter: $\varnothing 9.5$mm • Cable Counter: Metric & imperial counter
Transmitter		<ul style="list-style-type: none"> • Transmitter: built-in 512Hz • Effective distance: 4.5M
Spring connector		<ul style="list-style-type: none"> • Spring
Control Handle		<ul style="list-style-type: none"> • Size : 32\times83\times166mm • Work current: 20MA • power supply: DC 12V
Microphone		<ul style="list-style-type: none"> • Frequency response: 20-20KHz • Sensitivity: -47dB\pm2dB • Output impedance: $\leq 2.2K\Omega$ • Line Length: 1m

Optional Accessory

Camera heads <small>(960TV line waterproof IP68)</small>	
Size	ø50mm*118mm
Leds	6pcs
View angle	90°
Self-levelling	✓
Rotation (360° Panning; 180° Tilting)	✗
Suitable pipe diameter	60-400mm

Locator 512Hz Receiver	
Size	
Range	5m


Details



Model

Model	Display	Tip Dia.	Length	Rotation	Camera Res.
CB9-5030PT	9"	Ø50mm	30M	360° Panning; 180° Tilting	960TV line
CB9-5040PT	9"	Ø50mm	40M	360° Panning; 180° Tilting	960TV line
CB9-5050PT	9"	Ø50mm	50M	360° Panning; 180° Tilting	960TV line
CB9-5060PT	9"	Ø50mm	60M	360° Panning; 180° Tilting	960TV line
CB9-5080PT	9"	Ø50mm	80M	360° Panning; 180° Tilting	960TV line
CB9-50100PT	9"	Ø50mm	100M	360° Panning; 180° Tilting	960TV line
CB9-50120PT	9"	Ø50mm	120M	360° Panning; 180° Tilting	960TV line

Application

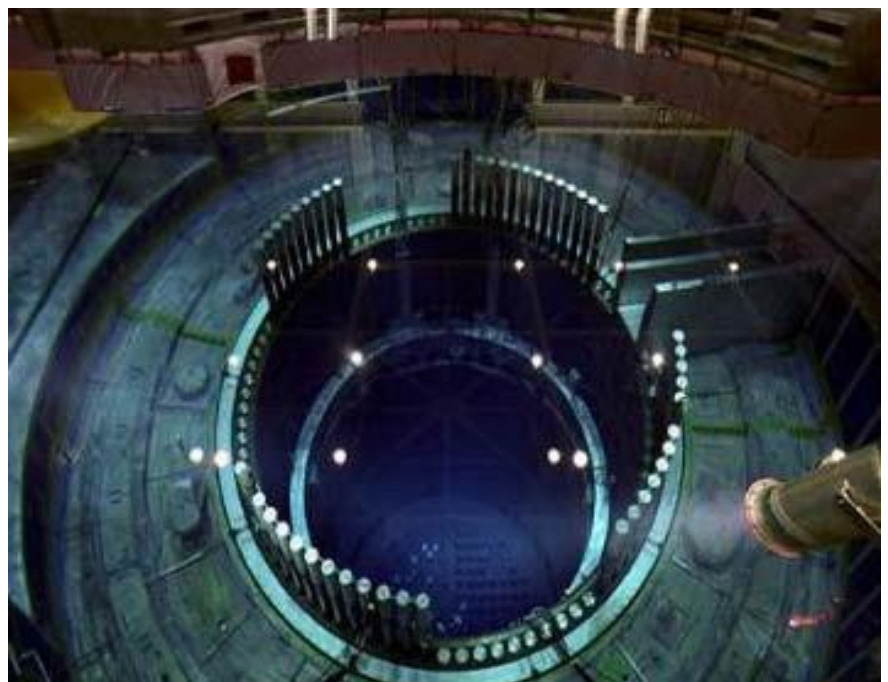

GMGA MEASURING

No. 33 Alley 99/120 Dinh Cong Ha, Dinh Cong Ward, Hoang Mai District, 10000 Hanoi City, Vietnam

Telephone: **+84 845 969 336**

Email: info@gmga.vn

Website: <https://gmga.vn/>