

LCR Meter

6363/6364/6365/6366/6367

Features

- Test frequency DC, 10Hz-20k/100k/200k/500k/1MHz
- Basic accuracy up to $\pm 0.05\%$
- Low frequency 6365A (DC, 0.1Hz-200kHz) can measuring aluminum electrolytic capacitors
- Synchronous tests with four parameter settings
- Multi-step function up to 8 sets
- USB Host can storage testing screen and data
- Support RS-232, GPIB, Handler, LAN, USB Host interfaces
- Using in production line, quality assurance or incoming quality control or automated testing department
- PC connection data analysis software is available
- BIN classification function



Accessories / Fixtures

Standard

- Power Cord
- F423906A

Optional

- PC Link Software
- F423503
- F423903
- F423905



Applications

Passive Components: Resistance, Capacitance, Inductance, Oscillators, Sensors, Delay Line, Filters, Resonators

Acoustic components: Speaker voice coil, headphone voice coil

Specifications

Model Name	6363	6364	6365	6366	6367
Test Frequency	10Hz-20kHz	10Hz-100kHz	10Hz-200kHz	10Hz-500kHz	10Hz-1MHz
Model Name	—	—	6365A	—	—
Test Frequency	—	—	0.1Hz-200kHz	—	—
Points of Test Frequency	programmable				
Frequency Resolution	5 Digits				
Frequency Output Accuracy	$\pm 0.01\%$				
Basic Accuracy	$\pm 0.05\%$				
AC / DC Drive Level	10mV to 2V (1mV resolution) 100uA-20mA				
Output Impedance	100Ω				
Measurement Parameters and Ranges	Z , R, X	0.001mΩ-99.999MΩ			
	Y , G, B	0.1nS-99.999S			
	Cs Cp	0.01pF-9.9999F			
	Ls Lp	0.1nH-99.999kH			
	D	0.00001-9.9999			
	Q	0.1-9999.9			
	DCR	0.001mΩ-99.999MΩ			
	Δ%	-9999%-999%			
	θ	-180° -+180°			
AC / DC Test Speed (Max.)	8mS				

General

Measured Value Detection Mode	Define upper and lower thresholds according to main and sub parameters
Measurement Circuit	Series/Parallel
Test Mode	Meter mode, Multi-step test mode
Test Range	Automatic, Lock
Indicator	Pass, Fail
Correction	Open Circuit/Short Circuit
Built-in Storage	128 sets
USB Host Storage	Testing screen and data
Trigger Test	Auto, Manual, RS-232, GPIB, Handler
Interface	USB Host, RS-232, GPIB, Handler, LAN
Power Supply	Voltage 98-132Vac or 195-264Vac (selectable)
	Frequency 47-63Hz
Power Consumption	65VA
Display	800*480 Color Screen, 7" TFT
Environment	Temperature: 10°C to 40°C, Humidity : 20~90%RH
Dimension (W*H*D)	358×148×343mm
Weight	3kg


Key Features

A Four Parameters Displayed




7.0" TFT, 800x480 color screen, and four parameters can display simultaneously.

B Multi-Step Test Mode

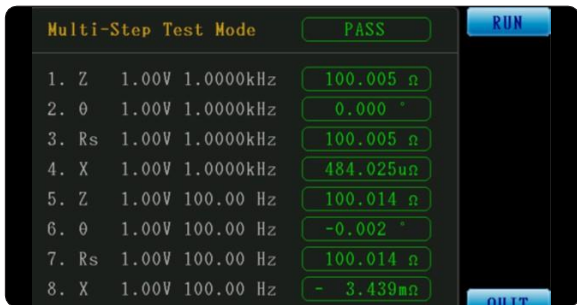

Multi-step function up to 8 sets.

C PC Link Software Sweeping Analysis (option)

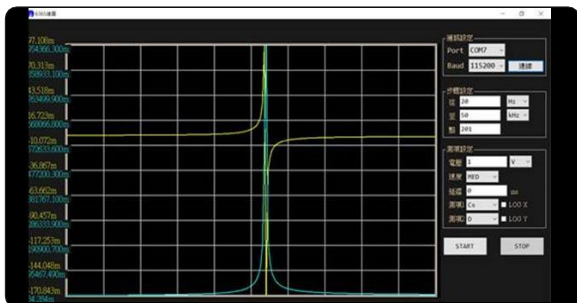

Connect 636x series with RS-232, GPIB or to computer and using sweeping analysis.

D USB Storage Testing Screen and Data



USB Host can storage test screen and data.

E Measuring Inductance



6365 test frequency 10Hz - 200kHz, the key parameters for inductance are Ls/Q/theta/Rs.

F Measuring Capacitance



6364 test frequency 10Hz - 100kHz, the key parameters for capacitance are Cp/D/theta/Rs.

GMGA MEASURING
 No. 33 Alley 99/120 Dinh Cong Ha, Dinh Cong Ward,
 Hoang Mai District, 10000 Hanoi City, Vietnam
 Telephone: **+84 845 969 336**
 Email: **info@gmga.vn**
 Website: **https://gmga.vn/**